

## 特性 Features

- |                         |  |
|-------------------------|--|
| ● 宽电压输入范围               | Wide range of input voltage                  |
| ● 输入宽频噪声滤波              | Broadband noise filter of input              |
| ● 输入浪涌电流抑制电路            | Surge suppress circuit of input              |
| ● 符合 UL1950、IEC950 安全规程 | Comply with UL1950, IEC950 safety regulation |
| ● 外型设计美观                | Attractive outline design                    |
| ● 接线端子出线方式              | Terminals connection method                  |
| ● 安装方便                  | Easy installation                            |
| ● 快速动态响应                | Fast dynamic response                        |



## 输入特性 Input Characteristic

电压范围 220 VAC (额定值) 176-264 VAC  
(Voltage Range)

反压保护 应用时外接熔丝  
(Reverse Protection) (Fuse Outside)

## 输出特性 Output Characteristic

电压精度 (Voltage Set-point Accuracy)	± 1%
电压调整率(主路) (Line Regulation<main>)	± 0.2%
负载调整率(主路) (Load Regulation<main>)	± 0.4%
温度变化率 (Temperature Coefficient)	± 0.01%/°C
电流限制点 (Output Current Limiting)	120%(Typ)
响应速度 (Dynamic Response)	400μs
交叉调节率 (Cross Regulation)	± 3%
输出电流 (Output Current)	3-20A 任选
输出电压 (Output Voltage)	1.8-48V
功率 (Power)	50-150W

## 一般特性 General Characteristic

工作频率 (Switching Frequency)	160-200	KHz
隔离电阻 (Isolation Resistance)	200	M Ω
MTBF	>500000	h
绝缘强度(Isolation Voltage)		
输入 - 输出 (Input-Output)	>1500 VAC/1min(漏电流<5mA)	
输入 - 外壳 (Input-Case)	>1500 VAC/1min(漏电流<5mA)	
输出 - 外壳 (Output-Case)	>500 VDC/1min	
主路 - 副路 (Main-Vice)	>500 VDC/1min	

## 环境特性(Environmental Characteristics)

工作壳温 (Case Temperature)	(工业品)-25 - +85°C (Industry)
	(军 I )-40 - +85°C (Military I)
	(军 II )-55 - +85°C (Military II)
存储温度 (Storage Temperature)	(工业品)-45 - +105°C (Industry)
	(军品)-55 - +105°C (Military)

## 热阻特性 Heat Characteristic

冷却方式 (Cooling)	热阻 (Thermal Resistance)
自然风冷 (Breeze of Nature)	1.90°C/W
0.5M/S	1.59°C/W
1M/S	1.18°C/W
1.5M/S	0.86°C/W
2M/S	0.71°C/W


## 型号 Models

	输入电压(Vdc) Input voltage	输入电压(范围) Input voltage<Range>	输出电压(Vdc) Output voltage	输出电流 (A) Output Current	纹波 pk-pk(mv) Ripple and noise	效率 (Typ) Efficiency	型号 Models
单路	220	176-264	5	20	50	81%	CEA100-220S05
	220	176-264	12	10.4	120	83%	CEA125-220S12
	220	176-264	24	6.25	200	84%	CEA150-220S24
双路	220	176-264	5&12	4&2.5	50&120	82%	CEA50-220D05&12
	220	176-264	5&15	5&3.3	50&150	84%	CEA75-220D05&15
	220	176-264	12&24	6&3.25	120&200	86%	CEA150-220D12&24
三路	220	176-264	± 12,+05	1.5/1.42/3	120&50	81%	CEA50-220T12+05
	220	176-264	± 15,+12	± 1.73/4	150&120	84%	CEA100-220T15+12
	220	176-264	± 12,+15	± 4/3.6	120&150	85%	CEA150-220T12+15

■说明: 仅列出典型型号, 其它型号, 请确定功率、输入电压及输出电压, 致电我公司。

Only typical models listed. If you need other model, please conform the power, input voltage and output voltage, then phone us.

## 外型尺寸图与引脚定义 Mechanical drawing and pin definition

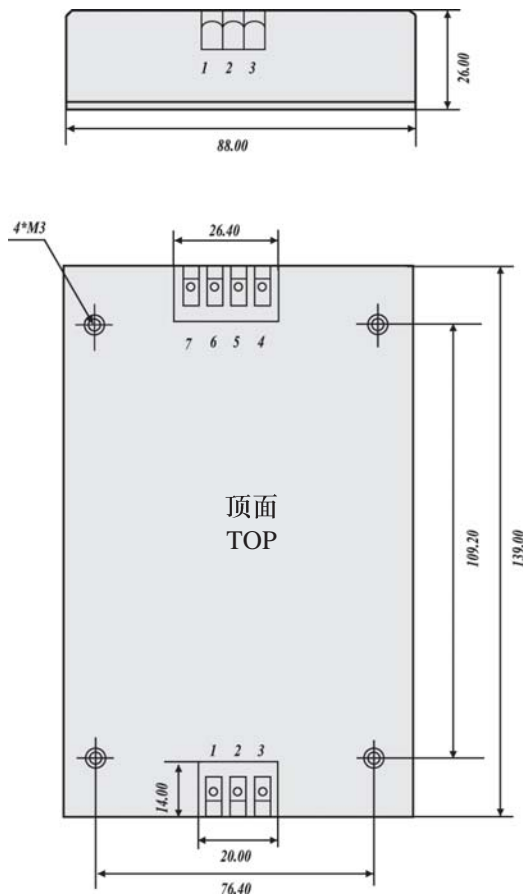

单位 (unit): mm

引脚 PIN	单路 SING	双路1 DOU1	双路2 DOU2	三路 TRIP
1	<i>Acin</i>	<i>Acin</i>	<i>Acin</i>	<i>Acin</i>
2	<i>Acin</i>	<i>Acin</i>	<i>Acin</i>	<i>Acin</i>
3	<i>Gr.</i>	<i>Gr.</i>	<i>Gr.</i>	<i>Gr.</i>
4	<i>NC</i>	<i>-Vo2</i>	<i>NC</i>	<i>-Vo3</i>
5	<i>NC</i>	<i>+Vo2</i>	<i>+Vo2</i>	<i>+Vo2</i>
6	<i>-Vo</i>	<i>-Vo1</i>	<i>GND</i>	<i>GND</i>
7	<i>+Vo</i>	<i>+Vo1</i>	<i>+Vo1</i>	<i>+Vo1</i>